

# NASQ-B

SMA to QMA, DC~6GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar


## Electrical

Frequency: DC~6GHz  
VSWR: 1.25 max.  
Impedance: 50Ω

## Mechanical

RF Connectors: SMA  
QMA  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated phosphor bronze

## Outline Drawings

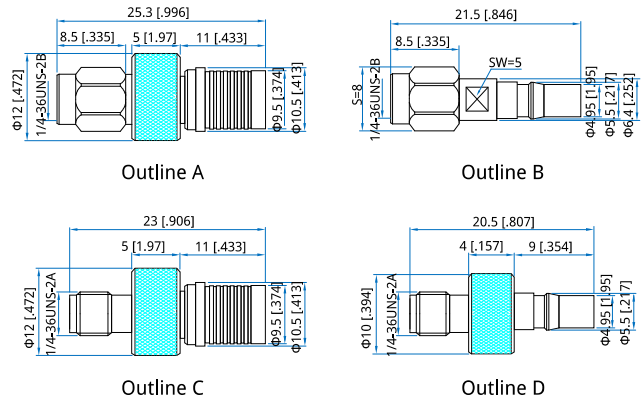

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

## How To Order

- NASQ-MM-B** - SMA (m) to QMA (m), Outline A
- NASQ-MF-B** - SMA (m) to QMA (f), Outline B
- NASQ-FM-B** - SMA (f) to QMA (m), Outline C
- NASQ-FF-B** - SMA (f) to QMA (f), Outline D

Customization is available upon request.