


NASQ SMA to QMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

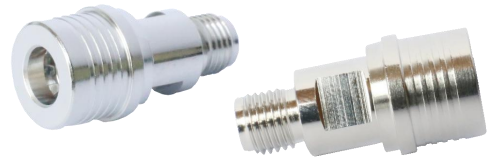

Electrical

Frequency: DC~6GHz
VSWR: 1.15 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
QMA
Mating Life Cycle: 500 cycles
Outer Conductor: Nickel plated brass
Dielectric: PEI or PTFE
Inner Conductor: Gold plated beryllium copper


Environmental

Temperature: -60~+125°C


Outline Drawings




Outline A



Outline B



Outline C



Outline D

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NASQ-MM - SMA (m) to QMA (m), Outline A

NASQ-MF - SMA (m) to QMA (f), Outline B

NASQ-FM - SMA (f) to QMA (m), Outline C

NASQ-FF - SMA (f) to QMA (f), Outline D

Customization is available upon request.