

NASX
SMA to MMCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
MMCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

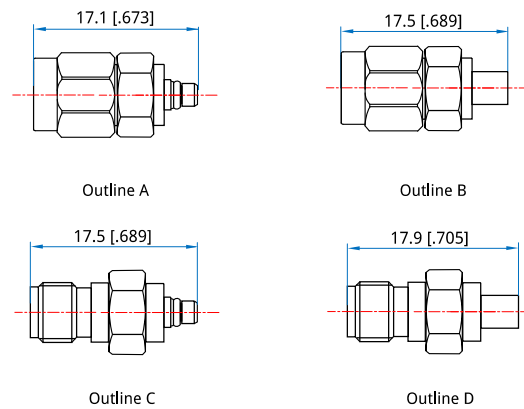

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NASX-MM** - SMA(m) to MMCX(m), Outline A
- NASX-MF** - SMA(m) to MMCX(f), Outline B
- NASX-FM** - SMA(f) to MMCX(m), Outline C
- NASX-FF** - SMA(f) to MMCX(f), Outline D

Customization is available upon request.