

NATN TNC to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: TNC
N
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -50~+85°C

Outline Drawings

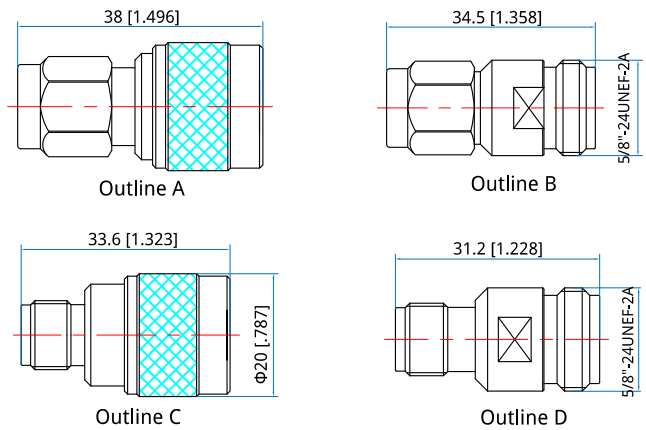

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NATN-MM - TNC(m) to N(m), Outline A

NATN-MF - TNC(m) to N(f), Outline B

NATN-FM - TNC(f) to N(m), Outline C

NATN-FF - TNC(f) to N(f), Outline D

Customization is available upon request.