

NATQ TNC to QMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC-6GHz
VSWR:	1.35 max.
Dielectric Withstanding Voltage:	1000V RMS, 50Hz, at sea level, min.
Working Voltage:	500V RMS, 50Hz, at sea level, max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	1.5mΩ max. (TNC) 3mΩ max. (QMA)
Impedance of Contact (Outer):	1mΩ max. (TNC) 2.5mΩ max. (QMA)
Impedance:	50Ω


Mechanical

RF Connectors:	TNC QMA
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature:	-45~+125°C
--------------	------------

Outline Drawings

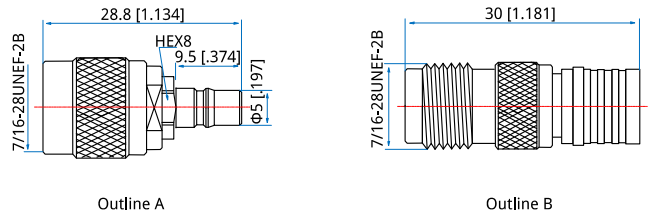

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NATQ-MF - TNC(m) to QMA(f), Outline A
NATQ-FM - TNC(f) to N(m), Outline B

Customization is available upon request.