

NATT

TNC to TNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
VSWR (Right Angle): 1.5 max.
Impedance: 50Ω


Mechanical

RF Connectors: TNC
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -50~+85°C

Outline Drawings

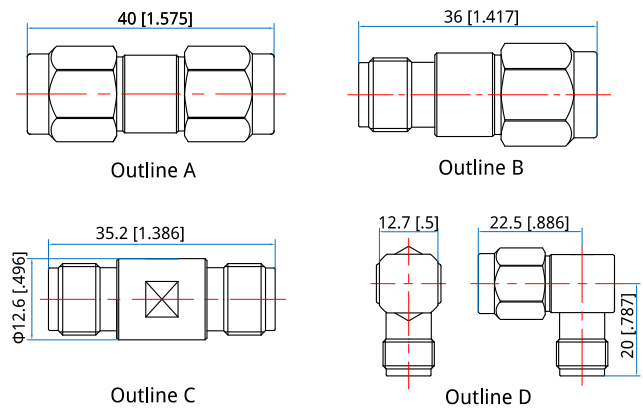

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NATT-MM** - TNC(m) to TNC(m), Outline A
- NATT-MF** - TNC(m) to TNC(f), Outline B
- NATT-FF** - TNC(f) to TNC(f), Outline C
- NATTR-MF** - TNC(m) to TNC(f), right angle, Outline D

Customization is available upon request.