

NAXX MMCX to MMCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
1.5 max. (Outline C)
Impedance: 50Ω

Mechanical

RF Connectors: MMCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

How To Order


NAXX-MM - MMCX(m) to MMCX(m), Outline A

NAXX-FF - MMCX(f) to MMCX(f), Outline B

NAXX-MF - MMCX(m) to MMCX(f), Outline C

Customization is available upon request.

Outline Drawings

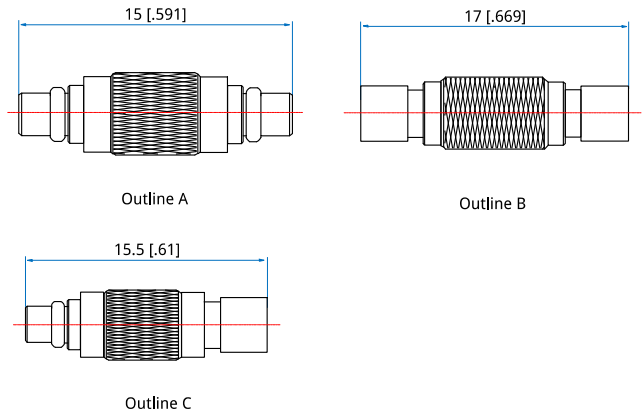

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]