

NAZZ

UHF (SL16) to UHF (SL16)

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~1GHz
VSWR:	1.2 max. (Excluding Outline D)
Dielectric Withstanding Voltage:	1500V RMS, 50Hz, at sea level, min.
Working Voltage:	750V RMS, 50Hz, at sea level, max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	5mΩ max.
Impedance of Contact (Outer):	5mΩ max.
Impedance:	50Ω


Mechanical

RF Connectors:	UHF (SL16)
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature: -45~+125°C

Outline Drawings

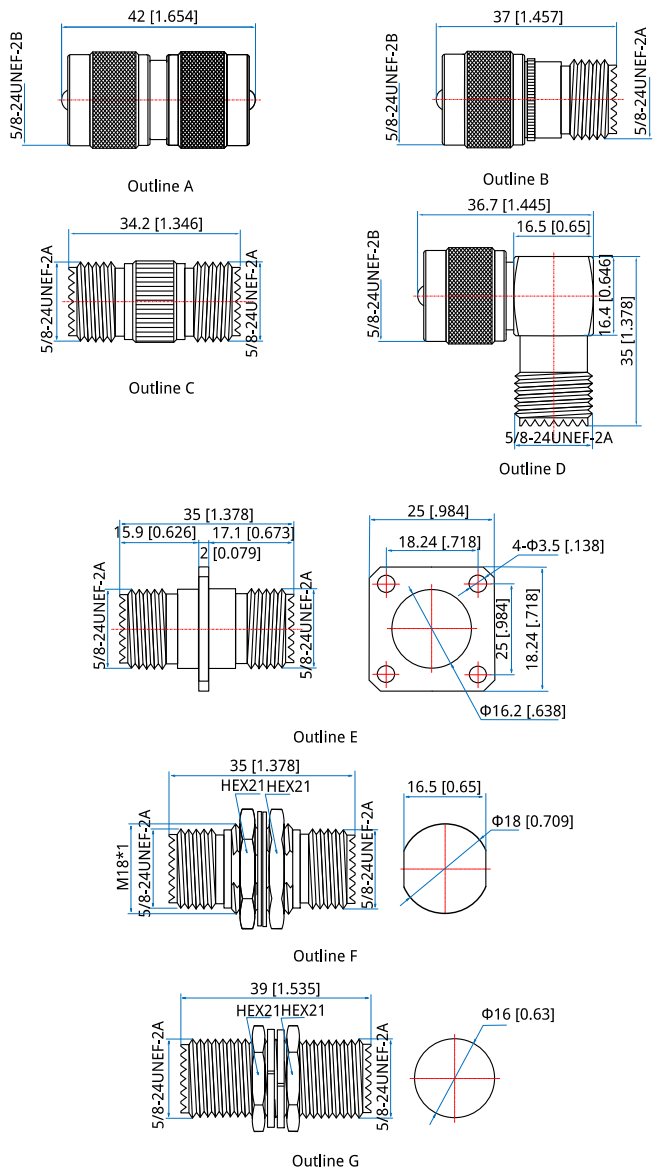

How To Order

NAZZ-MM - UHF (SL16) (m) to UHF (SL16) (m), Outline A

NAZZ-MF - UHF (SL16) (m) to UHF (SL16) (f), Outline B

NAZZ-FF - UHF (SL16) (f) to UHF (SL16) (f), Outline C

NAZZR-MF - UHF (SL16) (m) to UHF (SL16) (f), Outline D

NAZZL-FF - UHF (SL16) (f) to UHF (SL16) (f) flange mount, Outline E

NAZZH-FF-1 - UHF (SL16) (f) to UHF (SL16) (f) bulk head, Outline F

NAZZH-FF-2 - UHF (SL16) (f) to UHF (SL16) (f) bulk head, Outline G

Customization is available upon request.

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]