

NMS10S
DC~26.5GHz, SP9T~SP10T

- | | |
|----------------------|-------------------|
| Features: | Applications: |
| * Low VSWR | * Wireless |
| * Low Insertion Loss | * Transmitter |
| * High Isolation | * Laboratory Test |
| | * Radar |

Electrical

Frequency:		DC~26.5GHz		
Impedance:		50Ω		
Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR	
DC-6	0.3	70	1.3	
6-12	0.4	60	1.4	
12-18	0.6	50	1.6	
18-26.5	0.7	50	1.7	
Voltage*1 (V)		12	24	28
Current (mA)	Normally Open	300	150	140

[1] The voltage can be selected according to user requirements.

[2]

Mechanical


Size*2:	45.5*45.5*46.5mm 1.791*1.791*1.831in
Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	SMA Female
Power Supply & Control Interface Connectors:	D-Sub 15/D-Sub 26
Mounting:	4-Φ4.1mm through-hole

[2] Exclude connectors.

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-45~+85°C

Outline Drawings

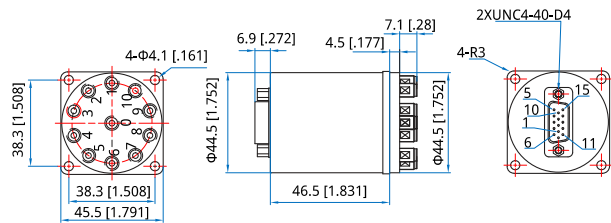

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

Additional Options

- TTL: T
- Indicators: I
- Extended Temperature: Z
- Positive Common
- Waterproof Sealing Type

How To Order

- NMSVS-F-WXYZ**
- V: 9~10 (SP9T~SP10T)
- F: Frequency in GHz
- W: Actuator Type. Normally Open: 3.
- X: Voltage. +12V: E, +24V: K, +28V: M.
- Y: Power Interface. D-Sub: 1.
- Z: Additional Options.

Examples:

To order a SP10T switch, DC-18GHz, Normally Open, +12V, D-Sub, TTL, Indicators, specify NMS10S-18-3E1TI.

Customization is available upon request.

Pin Numbering

Normally Open

Pin	Function	Pin	Function
1~10	V1~V10	22	Indicator (COM)
11	COM	23	VDC
12~21	Indicator (1~10)	24~26	NC

Normally Open&TTL

Pin	Function	Pin	Function
1~10	A1~A10	13~22	Indicator (1~10)
11	VDC	23	Indicator (COM)
12	COM	24~26	NC

Driving Schematic Diagram

