

NMS2N-12.4-2

DC~12.4GHz, SPDT

- | | |
|-----------------------|-------------------|
| Features: | Applications: |
| * High Power | * Wireless |
| * Long Operation Life | * Transmitter |
| | * Laboratory Test |
| | * Radar |

Electrical

Frequency: DC~12.4GHz
 Impedance: 50Ω

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR	Power (W)
DC~3	0.2	70	1.2	200
3~6	0.4	65	1.35	150
6~12.4	0.6	50	1.5	80

Mechanical


Size^{*1}: 68*37*23.5mm
 2.677*1.457*0.925in
 Switching Sequence: Break before Make
 Operation Life: 100000 Cycles
 RF Connectors: N Female
 Power Supply & Control: Manual
 Interface Connectors:
 Mounting: 2-Φ4.2mm through-hole
 2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature: -30~+65°C

Outline Drawings

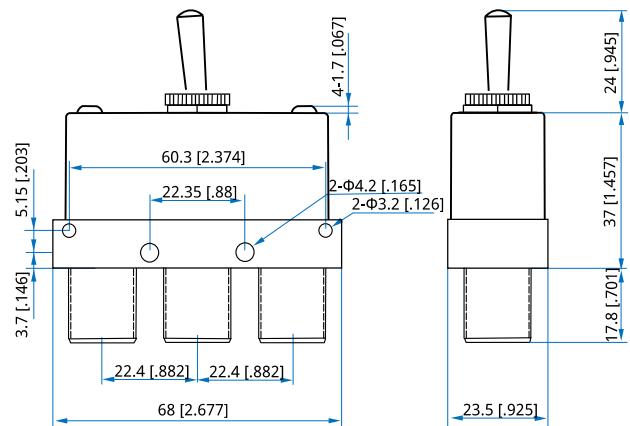

Unit: mm [in]
 Tolerance: ±0.5mm [±0.00in]

How To Order

NMS2N-12.4-2

Customization is available upon request.