

NMS2S-22-2

DC~22GHz, SPDT

- | | |
|---|---|
| Features:
* High Power
* Long Operation Life | Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar |
|---|---|

Electrical

Frequency:	DC~22GHz
VSWR:	1.5 max.
Insertion Loss:	0.5dB max.
Isolation:	50dB min.
Average Power:	50W
Impedance:	50Ω

Mechanical


Size ^{*1} :	34*22.05*13.2mm 1.339*0.868*0.52in
Switching Sequence:	Break before Make
Operation Life:	1M Cycles
RF Connectors:	SMA Female
Power Supply & Control	Manual
Interface Connectors:	
Mounting:	2-φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+65°C
Non-Operating Temperature:	-55~+85°C

Outline Drawings

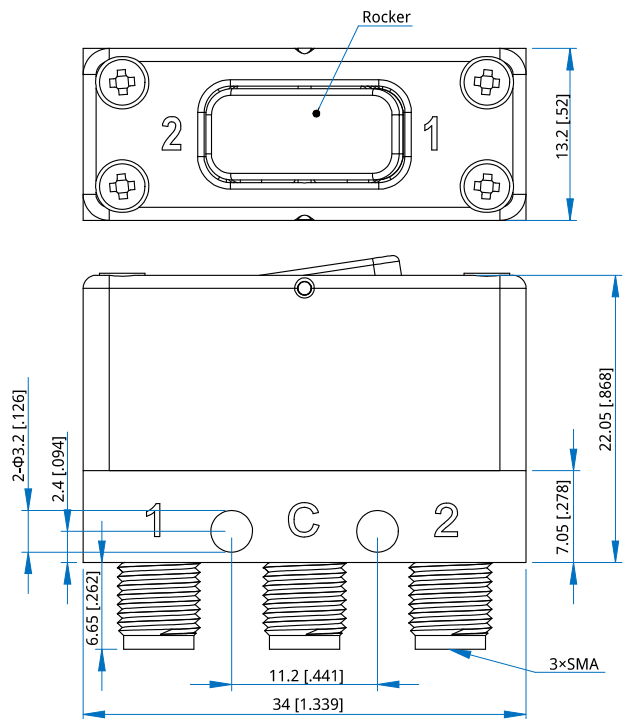

Unit: mm [in]
 Tolerance: ±0.5mm [±0.012in]

How To Order

NMS2S-22-2

Customization is available upon request.