

NMSD22

DC~50GHz, DPDT

- Features:
- * Low VSWR
 - * Low Insertion Loss
 - * High Isolation

- Applications:
- * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

Frequency: DC~50GHz
 Impedance: 50Ω

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
DC-6	0.3	70	1.3
6-12	0.4	60	1.4
12-18	0.5	55	1.5
18-26.5	0.7	50	1.7
26.5-32	0.8	50	1.8
32-40	0.9	50	1.9
40-50	1.0	45	2.0

Voltage*1 (V)	+12	+24	+28
Current (mA) Failsafe	350	200	180
Latching	400	200	185

[1] The voltage can be selected according to user requirements.

Mechanical


Size*2:	32*32*62mm 1.26*1.26*2.44in
Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	2.4mm Female
Power Supply & Control Interface Connectors:	D-Sub 15
Mounting:	4-Φ4mm through-hole

[2] Exclude connectors.

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-40~+85°C

Outline Drawings

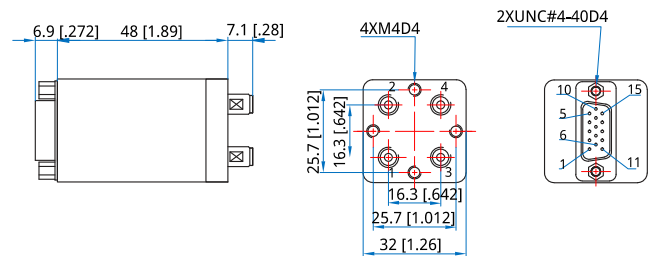

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

Additional Options

- TTL: T
- Indicators: I
- Extended Temperature: Z
- Positive Common
- Waterproof Sealing Type

How To Order

NMSD22-F-WXYZ

- F: Frequency in GHz
- W: Actuator Type. Failsafe: 0, Latching: 1.
- X: Voltage. +12V: E, +24V: K, +28V: M.
- Y: Power Interface. Pin: 0, D-Sub: 1.
- Z: Additional Options.

Examples:

To order a DPDT switch, DC-18GHz, Failsafe, +12V, D-Sub, TTL, Indicators, specify NMSD22-18-0E1TI.

Customization is available upon request.

Pin Numbering

Failsafe

Pin	Function	Pin	Function
1	COM(RF: 1 to 3)	13~14	Indicator (1~2)
2	VDC(RF: 1 to 3)	15	Indicator (COM)
3~12	NC		

Failsafe&TTL

Pin	Function	Pin	Function
1	VDC(RF: 1 to 3)	4~12	NC
2	COM(RF: 1 to 3)	13~14	Indicator (1~2)
3	A1(RF: 1 to 3)	15	Indicator (COM)

Latching

Pin	Function	Pin	Function
1	V1(RF: 1 to 2)	4~12	NC
2	V2(RF: 1 to 3)	13~14	Indicator (1~2)
3	COM	15	Indicator (COM)

Latching&TTL

Pin	Function	Pin	Function
1	VDC	5~12	NC
2	COM	13~14	Indicator (1~2)
3	A1(RF: 1 to 2)	15	Indicator (COM)
4	A2(RF: 1 to 3)		

Driving Schematic Diagram

