

NCT26K1

DC~26.5GHz, 100W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency Range:	DC~26.5GHz
Average Power*1:	100W
Impedance:	50Ω
VSWR:	1.4 max.

[1] Derated linearly to 5W@120°C.

Mechanical


Size*2:	Φ63*108.4mm Φ2.48*4.268in
Weight:	400g
Connectors:	SMA
Housing:	Aluminum
Outer Conductor:	Gold plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

[2] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

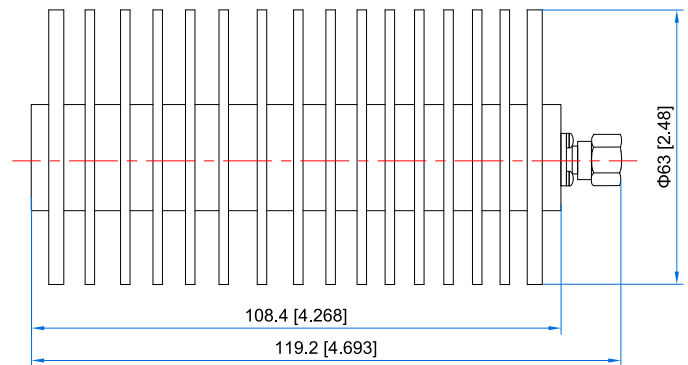

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NCT26K1-X-Y

X: Frequency in GHz
 Y: Connector type

Connector naming rules:
 S - SMA male
 SF - SMA female

Examples:
 To order a termination, DC-26.5GHz, SMA male, specify NCT26K1-26.5-S.

Customization is available upon request.