

NCT67R5

DC~67GHz, 0.5W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency Range:	DC~67GHz
Average Power:	0.5W
VSWR:	1.45 max.
Impedance:	50Ω

Mechanical

Connector:	1.85mm
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+125°C
--------------	------------

How To Order

NCT67R5-X-Y

X: Frequency in GHz

Y: Connector type

Connector naming rules:

V - 1.85mm Male, (Outline A)



VF - 1.85mm Female, (Outline B)

Examples:

To order a termination, DC-67GHz, 1.85mm male, specify NCT67R5-67-V.

Customization is available upon request.

Outline Drawings

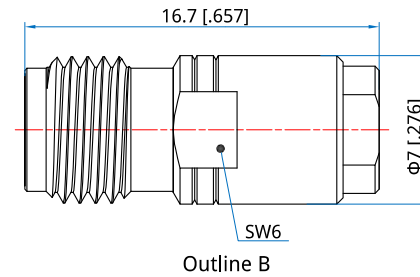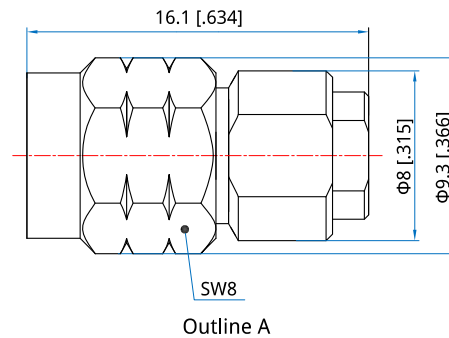

Unit: mm [in]
Tolerance: ±2mm [±0.08in]