

ND-10-40000

Broadband & High Sensitivity

Features:
 * Broadband
 * High Sensitivity

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.01~40GHz
Sensitivity:	350mV/mW
Flatness:	±1.75dB max.
VSWR:	2 max.
Polarity:	Negative
Input Power Without Damage:	20dBm


Mechanical

Size*1:	Φ9.5*34.8mm Φ0.374*1.370in
Weight:	100g max.
Input Connector:	2.4mm Male
Output Connector:	SMA Female

Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

Outline Drawings

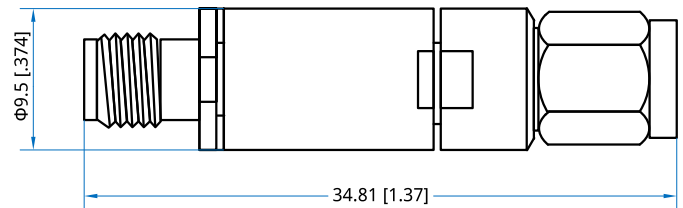

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

ND-10-40000

Customization is available upon request.