


NDA-10-13000-40-10

10MHz~13GHz, 40dB, 10dB

Features:
 * Broadband
 * High Dynamic Range

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

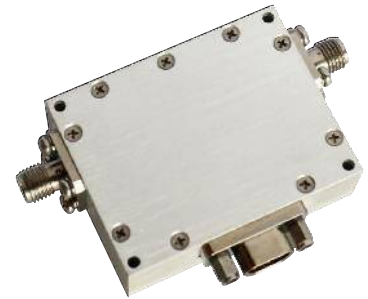

Electrical

Frequency:	0.01~13GHz
Insertion Loss:	7dB max.
Attenuation Flatness:	±1dB max.
Control Bits:	4
Step:	10dB
Attenuation Range:	0~40dB
Attenuation Accuracy:	3% of attenuation setting max.
Switching Time:	100nS max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Voltage:	±5V DC
Current:	0.1A typ.
Input Power Without Damage:	37dBm max.

Mechanical


Size*1:	45*35*15mm 1.772*1.378*0.591in
Weight:	200g typ.
RF Connectors:	SMA Female
Power Supply & Control Interface Connectors:	J30J-9ZKP
Housing Material:	Aluminum
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+70°C

Outline Drawings

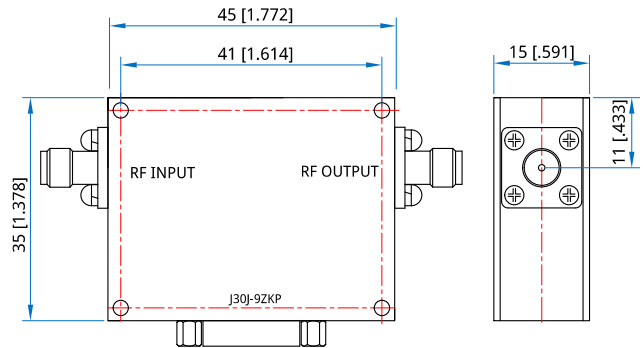

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

Pin Numbering

Pin	Function	Pin	Function
1	+5V	6	30dB
2	-5V	7	40dB
3	GND	8	NC
4	10dB	9	NC
5	20dB		

How To Order

NDA-10-13000-40-10

Customization is available upon request.