

NDA-30000-40000-30-0.5

30~40GHz, 30dB, 0.5dB

- | | |
|---|---|
| Features:
* Broadband
* High Dynamic Range | Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar |
|---|---|

Electrical


Frequency:	30~40GHz
Insertion Loss:	5.5dB typ.
Attenuation Range:	0~30dB
Step:	0.5dB
Attenuation Accuracy:	3~5% of attenuation setting typ.
VSWR:	1.5 typ.
Voltage:	-5V DC
Control:	TTL
Input Power:	+25dBm max.
Impedance:	50Ω

Mechanical

Size*1:	30*20*8mm 1.181*0.787*0.315in
Weight:	100g max.
RF Connectors:	SMA Female
Mounting:	3-M2.5 through hole 4-M2, depth 4mm

Environmental

Operating Temperature:	-40~+60°C
Non-operating Temperature:	-55~+85°C

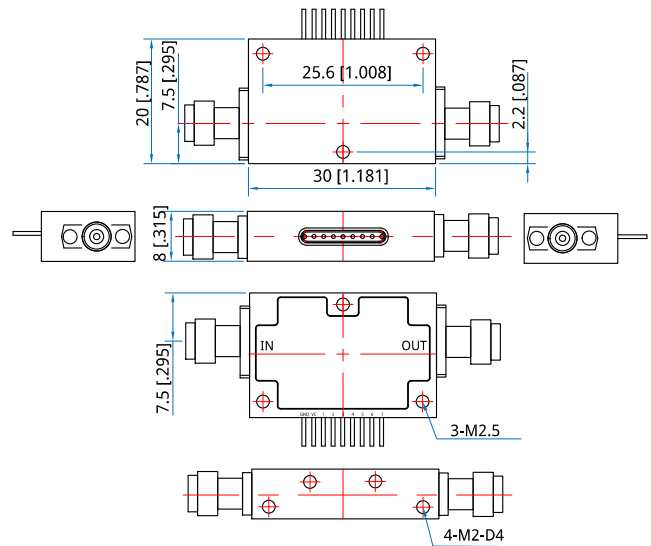

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

[NDA-30000-40000-30-0.5](#)

Customization is available upon request.