

NPX 14615-15250MHz DPX Duplexer, 14.4-14.83GHz / 15.15-15.35GHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers
* Antennas
* Laboratory Test

Electrical

Frequency: 14.4~14.83GHz/15.15~15.35GHz
 Insertion Loss: 2.2dB max.
 Pass Band Ripple : 0.8dB max.
 Return Loss: 18dB min.
 Rejection: 80dB min.
 Impedance: 50Ω
 Input Power: 20W CW max.

Mechanical


Size*1: 62.0 x 47.0 x 17.5mm
 2.44*1.85*0.689in
 Finish: Silver plating
 Connectors: SMA Female
 Mounting: 4- 2.3x0.4p DP5.0 through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -40~ +70°C

Outline Drawings

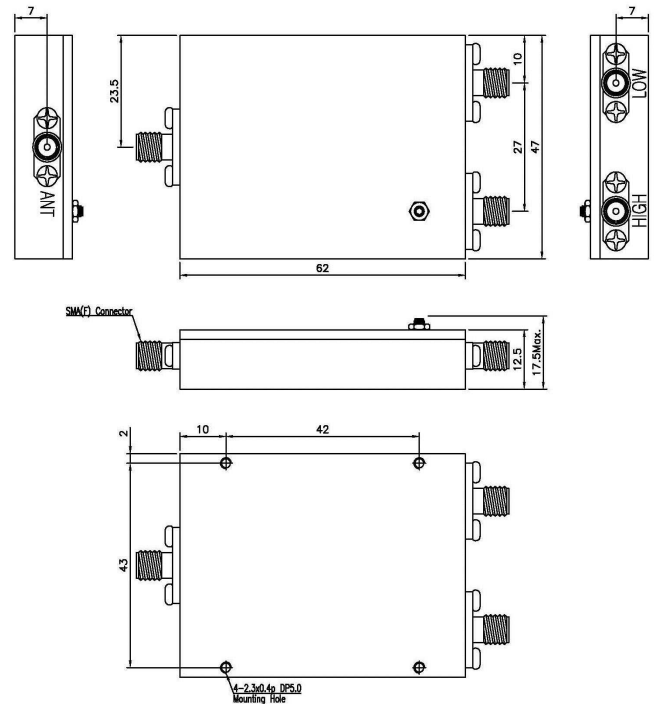

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

[NPX 14615-15250MHz DPX](#)

Customization is available upon request.

