

NPX 831.5 876.5 MHz DPX

Duplexer, 814~849 / 859~894 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	814~849 MHz / 859~894 MHz
Insertion Loss:	1.1dB max
Pass Band Ripple :	0.75 dB max.
Return Loss :	20.0dB min.
Rejection:	70.0dB min.
Impedance:	50Ω
Input Power Handling:	100 W @ each input port per port.

Mechanical

Dimension (W*D*H):	120.00*113.00*41.00mm
Finish:	Black Epoxy Painting
Connectors:	N Type Female
Mounting:	4-M3.0x0.5p DP6.0 through-hole

[1] Exclude connectors.

Environmental


Operation Temperature: -40~ +70°C

How To Order

NPX 831.5 876.5 MHz DPX

Customization is available upon request.

Outline Drawings

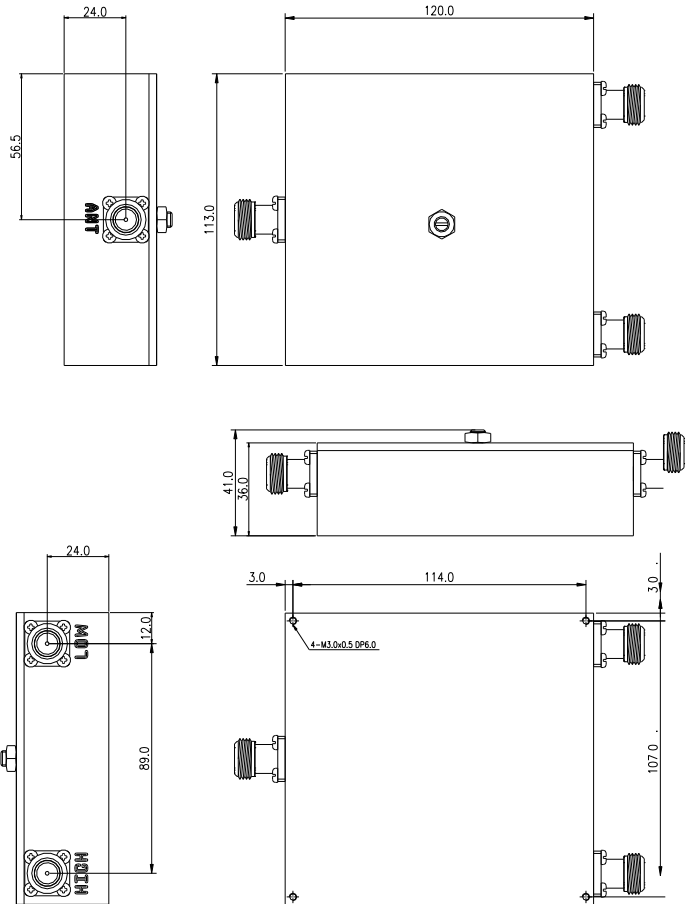

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

