

### NPX 832-821 MHz DPX Duplexer, 832-862 MHz / 791-821 MHz

#### Features:

- \* Small Size
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

#### Electrical

Frequency: 832-862 MHz / 791-821MHz

Insertion Loss: 0.75dB max.

Pass Band Ripple : 0.45dB max.

Return Loss : 18.0dB min.

Rejection: 50dB min.

Impedance: 50Ω

Input Power Handling: 60 W @ each input port per port.

#### Mechanical

Dimension (W\*D\*H): 116\*106\*30

Finish: Silver plating

Connectors: SMA Female


Mounting: 4- 2.3x0.4p DP5.0 through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature: -40~ + 70°C

#### Outline Drawings

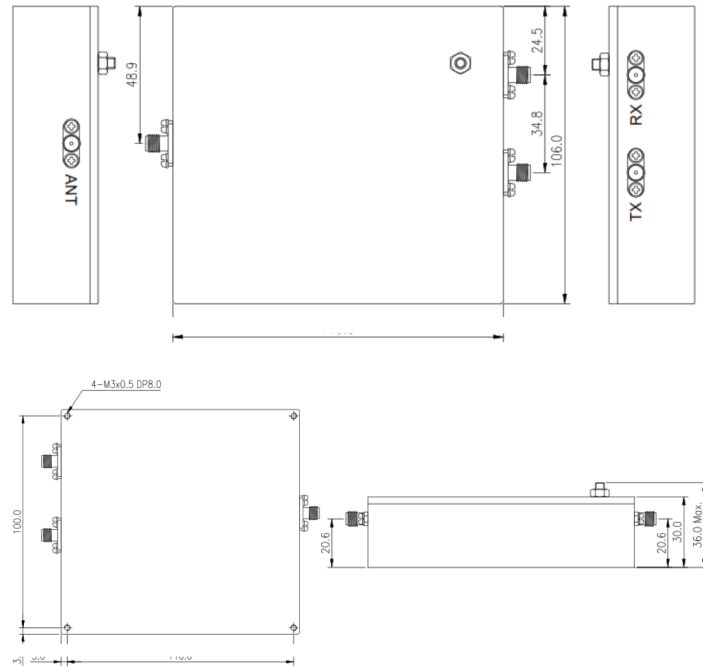

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

[NPX 832- 821 MHz DPX](#)

Customization is available upon request.