

NPX 875/1842/2140/2545MHz QPX

Quadplexer, 875/1842/2140/2545 MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency: 791-960 MHz 1805-1880 MHz
 2110-2170 MHz 2400-2690 MHz
 Insertion Loss: 0.5dB max.
 Pass Band Ripple : 0.3dB max.
 Return Loss: 15dB min.
 Rejection: 50dB min.
 Impedance: 50Ω
 Input Power: 100W CW max.
 Lightning Protection : IEC 61000-4-5; 5kA,8/20uS

Mechanical

Size^{*1}: 104,0x83,0x58,0 mm
 Weight : 850 g Max.
 Finish: Black painting
 Connectors: N Type Female
 Mounting: 4- 2.3x0.4p DP5.0 through-hole

[1] Exclude connectors.

Environmental


Operation Temperature: -30~ +70°C

How To Order

[NPX 14615-15250MHz DPX](#)

Customization is available upon request.

Outline Drawings

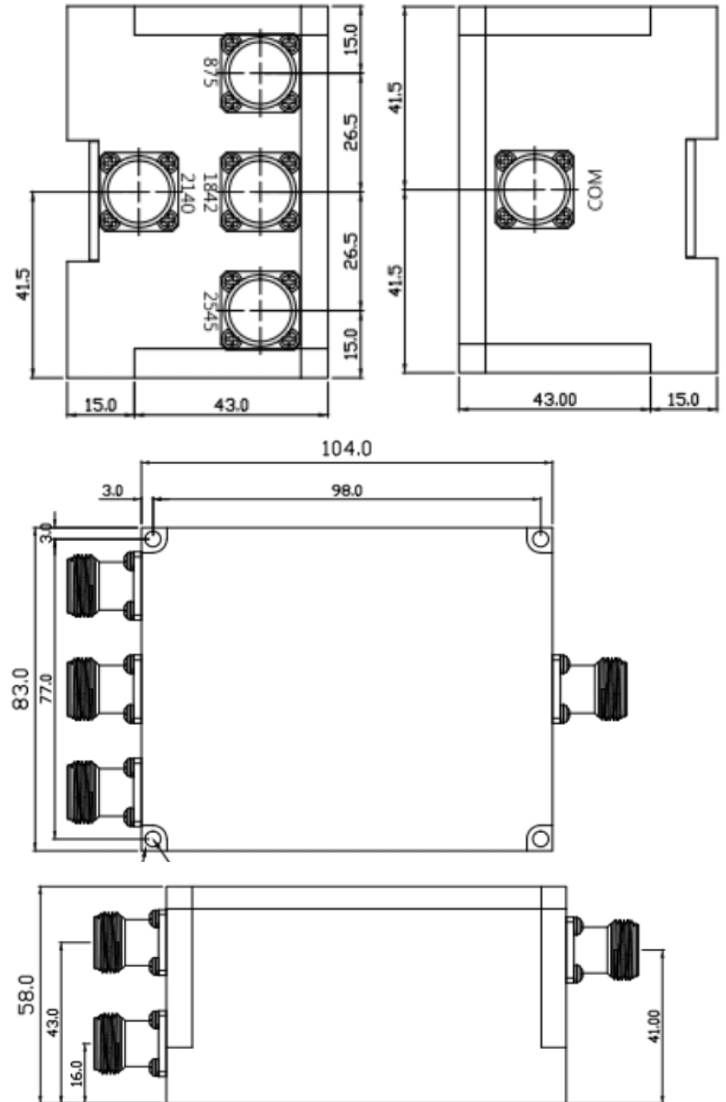

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]