

NPX 920-1795-2045MHz_A TPX

Triplexer, 880-960/1710-1880/1920-2170 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency :	880-960/1710-1880/1920-2170 MHz
Insertion Loss :	0.9 dB max.
Pass Band Ripple :	0.50 dB max.
Return Loss :	18.0dBmin.
Rejection :	60dB min.
Impedance :	50
Input Power :	100W max. at per port / 300W max. at Sum port

Mechanical

Dimension (W*D*H):	146,0*121,0*44
Finish:	Silver plating
Connectors:	N Female
Mounting:	4- M3x0.5p DP6.0 through-hole

[1] Exclude connectors.

Environmental


Operation Temperature: -40~ +70°C

How To Order

[NPX 920-1795-2045MHz_A TPX](#)

Customization is available upon request.

Outline Drawings

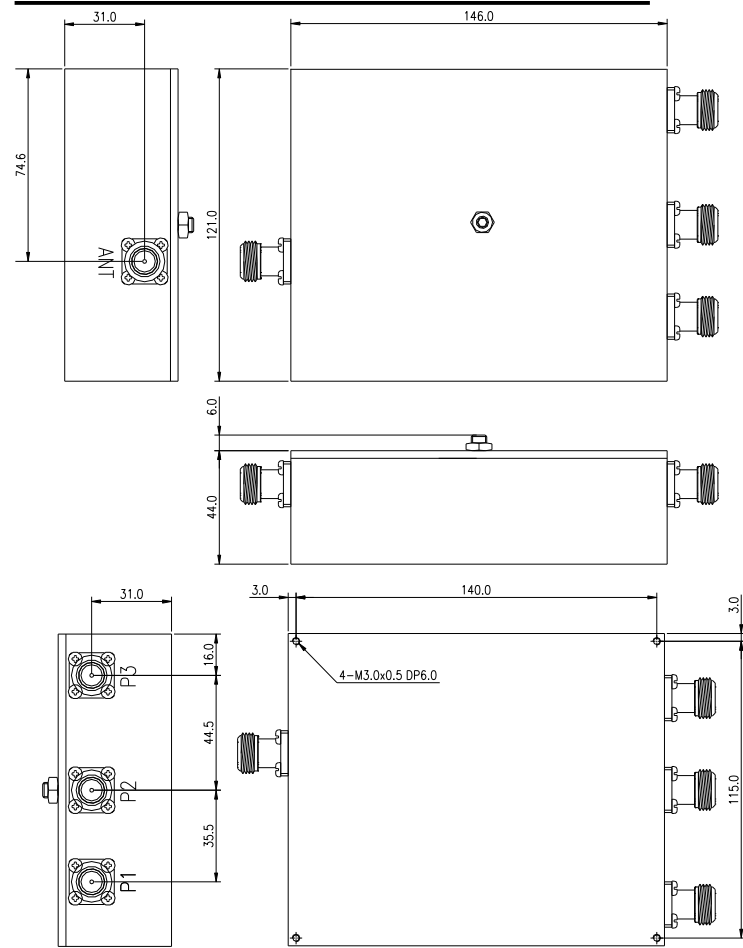

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]