

NPX 942-897 MHz DPX

Duplexer, 925-960 MHz / 880-915 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

| | |
|-----------------------|----------------------------------|
| Frequency: | 925-960 MHz / 880-915 MHz |
| Insertion Loss: | 0.75dB max. |
| Pass Band Ripple : | 0.45dB max. |
| Return Loss : | 18.0dB min. |
| Rejection: | 50dB min. |
| Impedance: | 50Ω |
| Input Power Handling: | 60 W @ each input port per port. |

Mechanical

| | |
|--------------------|-------------------------------|
| Dimension (W*D*H): | 106*116*30 |
| Finish: | Silver plating |
| Connectors: | SMA Female |
| Mounting: | 4- M3x0.5p DP8.0 through-hole |

[1] Exclude connectors.

Environmental


Operation Temperature: -40~ +70°C

How To Order

NPX 942-897 MHz DPX

Customization is available upon request.

Outline Drawings

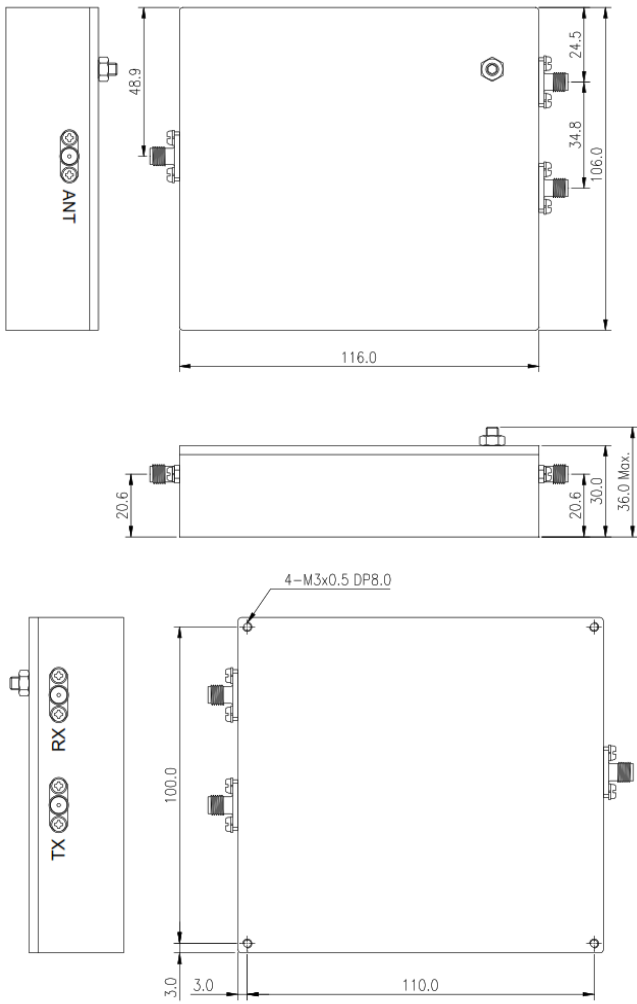

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

