

## NELC-KF-5

2.92mm, DC~40GHz

**Features:**

- \* Low VSWR
- \* No welding
- \* Reusable
- \* Easy installation

**Applications:**

- \* Laboratory Test

**Electrical**

Frequency: DC~40GHz  
 VSWR: 1.35 max.  
 Impedance: 50Ω

**Mechanical**

RF Connector: 2.92mm female  
 Outer Conductor: Gold plated brass  
 Dielectric: PTFE  
 Inner Conductor: Gold plated beryllium copper

**Environmental**


Temperature: -40~+105°C

**How To Order**

**NELC-KF-5**

Customization is available upon request.

**Outline Drawings**

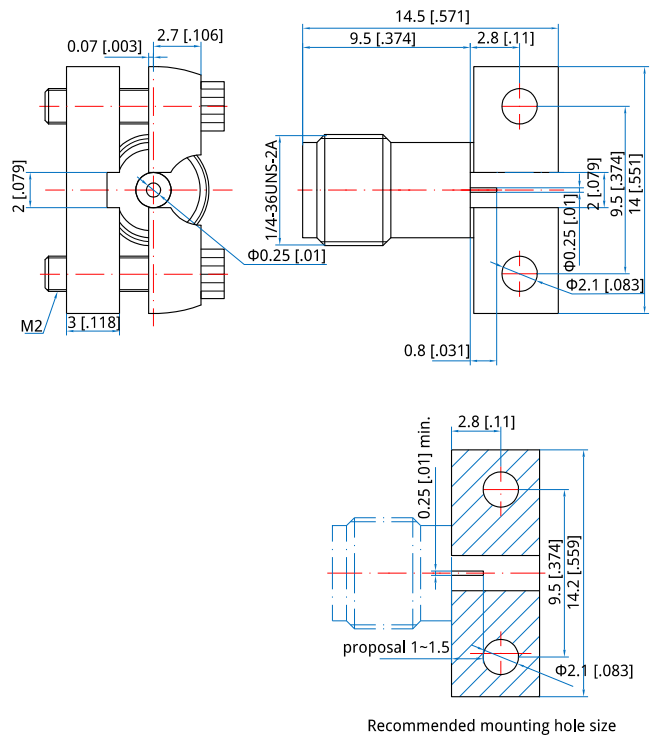

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in](Screw sleeve)