NELC-S-1

SMA, DC~26.5GHz

Features:
* Low VSWR
* No welding
* Reusable
* Easy installation

Applications:
* Laboratory Test

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance:	50Ω

Mechanical

RF Connector:	SMA
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI & PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165℃

How To Order

NELC-S-1 - Outline A

NELC-SF-1 - Outline B

Customization is available upon request.

Outline Drawings

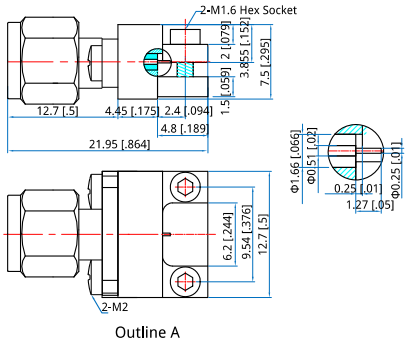

Outline A

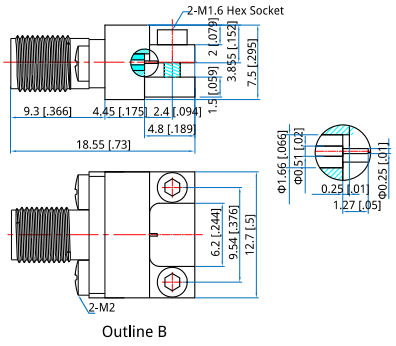

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]