

NELC-SF-6
SMA, DC~18GHz

Features:

- * Low VSWR
- * No welding
- * Reusable
- * Easy installation

Applications:

- * Laboratory Test

Electrical

Frequency: DC~18GHz
VSWR: 1.5
Impedance: 50Ω

Mechanical

RF Conductor: SMA Female
Inner Conductor: Beryllium copper
Outer Conductor: Brass

Environmental


Temperature: -40~+165°C

How To Order

NELC-SF-6

Customization is available upon request.

Outline Drawings

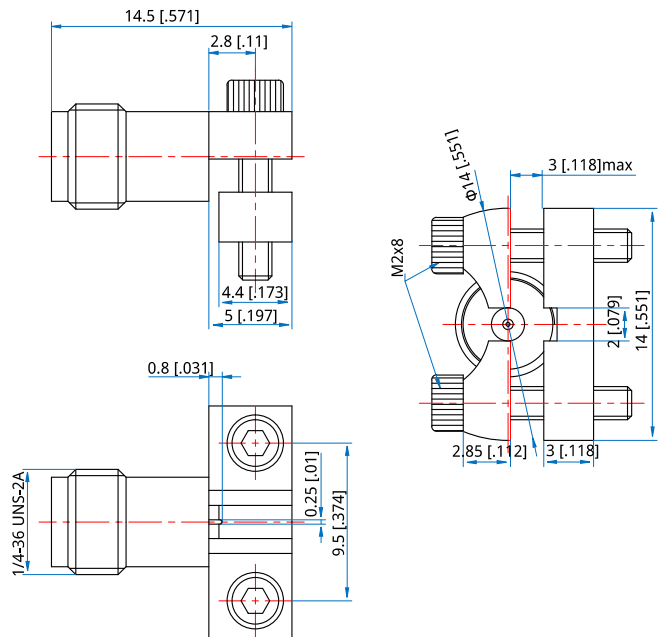

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]