

NE-700-1300-S-3.5

0.7~1.3GHz, 3.5dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.7~1.3GHz
Insertion Loss:	1dB
VSWR:	1.6 max.
Slope:	3.5dB min.
	4.5dB @0.7GHz
	1dB @1.3GHz
Flatness:	±0.3dB


Mechanical

Size*1:	26*20*12mm
	1.024*0.787*0.472in
Connectors:	SMA male/female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Outline Drawings

(The shape is general, and may vary slightly due to different frequency bands.)

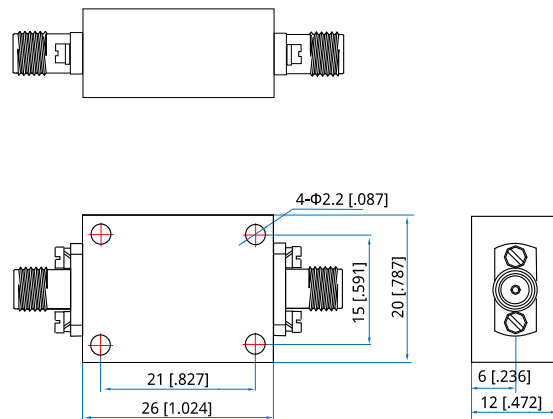

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NE-700-1300-S-3.5

Customization is available upon request.