

NFNTW-D650

WRD-650, 6.5~18GHz

Features:

- * Low VSWR
- * Low Insertion Loss

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Instrumentation

Electrical

Frequency: 6.5~18GHz
 VSWR: 1.3 max.

Mechanical

Waveguide Size: WRD-650
 Flange: FMWRD650
 E-plane Bend Radius: 44mm min.
 H-plane Bend Radius: 76mm min.
 Torsion Angle: Non-twistable
 Flange Material: Nickel plated brass
 Waveguide Material: Silver plated brass
 Jacket Material: Vulcanized silicone rubber

How To Order

NFNTW-D650-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

381 - 381mm (Outline A)

Material naming rules:

B - Brass (Outline A)

Flange naming rules:


17 - FMWRD650 (Outline A)

Examples:

To order a Flexible Non-Twistable Waveguide, WR-D650, 381mm, Brass, FMWRD650, specify NFNTW-D650-381-B-17.

Customization is available upon request.

Outline Drawings

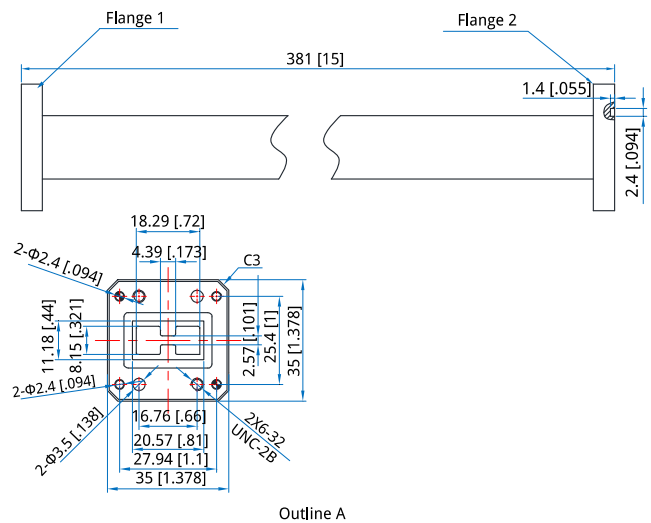

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]