

NFM2-13500-14500-20
13.5~14.5GHz, 20dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Broadband | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical

Input Frequency:	6.5~7.5GHz
Output Frequency:	13.5~14.5GHz
Input Power:	+12~+15dBm
Output Power:	+20dBm min.
Multiple Ratio:	2
Spurious:	-80dBc max.
Harmonic:	-25dBc max.
2 th Harmonic:	-30dBc max.
Voltage:	+15V DC
Current:	200mA max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	45*25*8mm 1.772*0.984*0.315in
RF Connectors:	SMA Female (detachable, Φ 0.38 stitches)
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

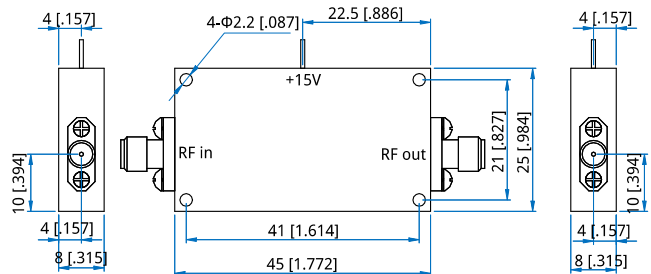

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NFM2-13500-14500-20

Customization is available upon request.