

NHF-5480-18000-50

5.48~18GHz, 50dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	5.48~18GHz
Passband Insertion Loss:	0.9dB max.
VSWR:	2 max.
Stopband Attenuation:	50dB@DC~3.5GHz min.
Power:	10W max.

Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental


Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

How To Order

[NHF-5480-18000-50](#)

Customization is available upon request.

Outline Drawings

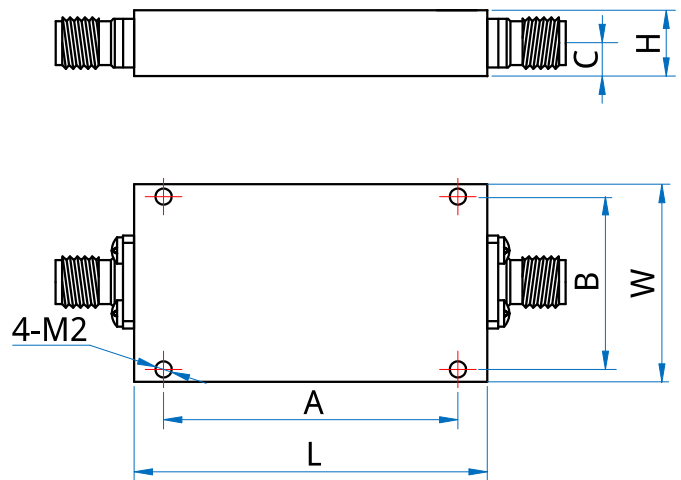

Size	L	W	H	A	B	C
mm	31	24	11	27	20	5.5
in	1.22	0.945	0.433	1.063	0.787	0.217

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]