

NL-300-6000-10

0.3~6GHz, 10dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 0.3~6GHz
 Insertion Loss: 1.2dB max.
 Flat Leakage: 10dBm max.
 VSWR: 1.5 max.
 Average Power: 10W
 Impedance: 50Ω

Mechanical


Size^{*1}: 20*13*13mm
 0.787*0.512*0.512in
 RF Connectors: SMA Female
 Mounting: 2-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -45~+75°C

Outline Drawings

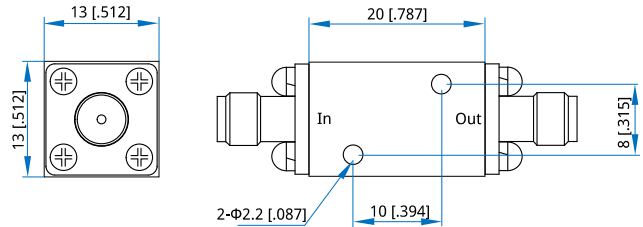

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order
NL-300-6000-10

Customization is available upon request.