

NPAS-600-6000-43-43S
0.6~6GHz, 43dB, 43dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Broadband | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical


Frequency:	0.6~6GHz
Output Power (Psat):	43dBm min.
Input Power:	0dBm max.
Gain:	43dB min.
Gain Flatness:	±4dB max.
Input VSWR:	2 max.
Spurious:	-60dBc max.
Harmonic:	-15dBc max.
Impedance:	50Ω
Voltage:	220V AC

Mechanical

Size:	526.7*483*147mm 20.736*19.016*5.787in
RF Connector:	SMA Female
Power Supply & Control Interface:	RS485, LAN
Cooling:	Forced air

Environmental

Operating Temperature:	0~+50°C
------------------------	---------

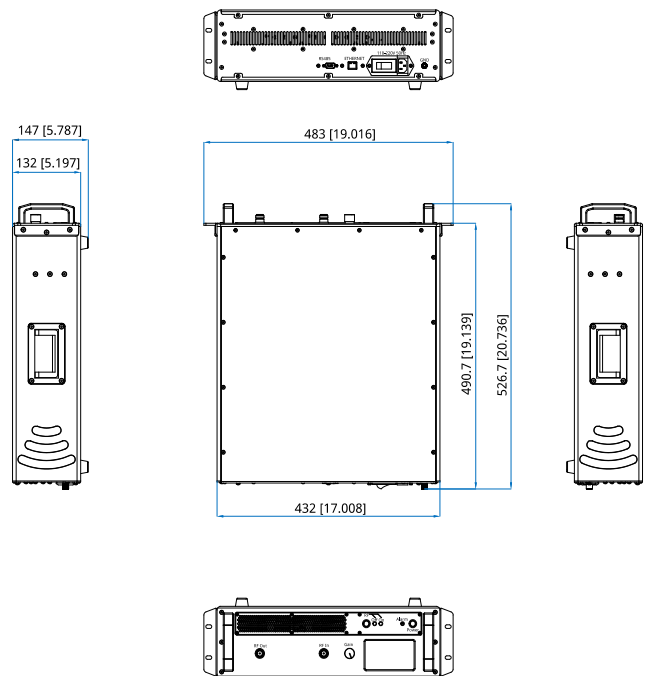

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order
[NPAS-600-6000-43-43S](#)

Customization is available upon request.

Outline Drawings