

NPAS-700-2700-50-50S
0.7~2.7GHz, 50dB, 50dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Small Size | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical

Frequency:	700~2700MHz
Gain:	50dB min.
Gain Flatness:	±2dB max.
Output Power (Psat):	50dBm typ.
Harmonic:	-10dBc typ.
Spurious:	-60dBc typ.
VSWR:	2.0 typ.
Voltage:	220V AC
Input Power Without Damage:	0dBm max.

Mechanical

Size:	544.5*426*128mm
	21.437*16.772*5.039in
RF Connectors:	SMA Female, N Female
Control Connectors:	DB9
Cooling:	Forced Air

Environmental


Operating Temperature: 0~+50°C

How To Order

NPAS-700-2700-50-50S

Customization is available upon request.

Outline Drawings

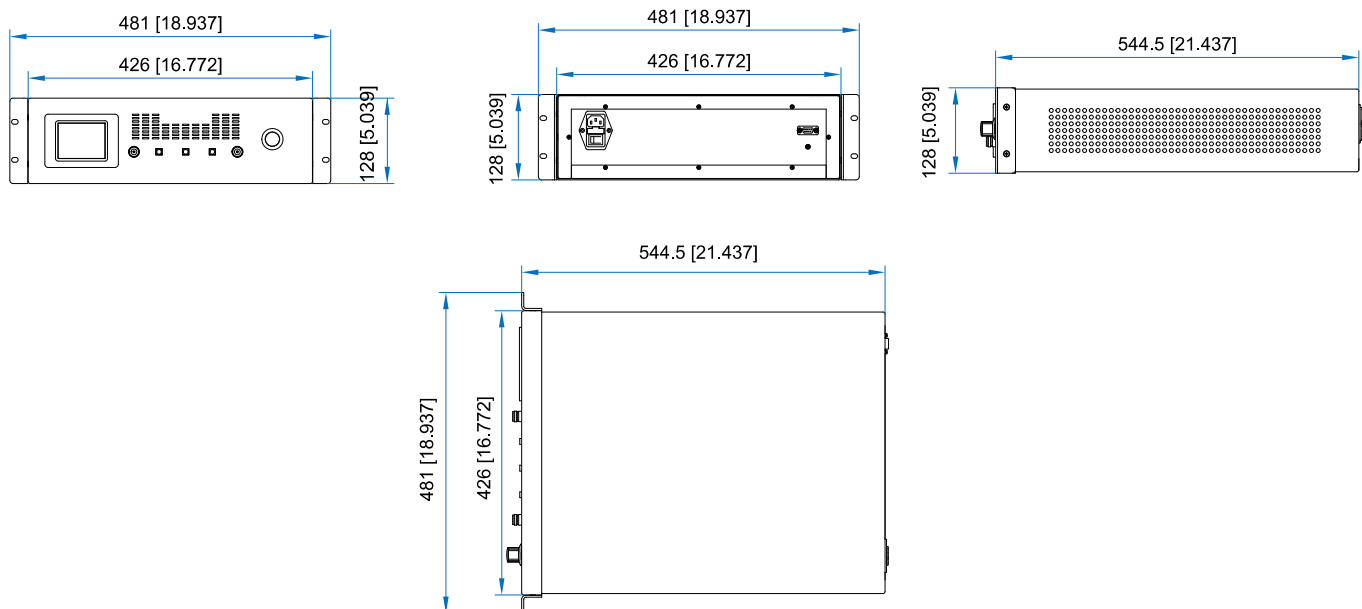

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]