

## NPA-18000-40000-20-20

18~40GHz, 20dB, 20dBm

- |                         |                   |
|-------------------------|-------------------|
| Features:               | Applications:     |
| * Small Size            | * Wireless        |
| * Low Power Consumption | * Transmitter     |
|                         | * Laboratory Test |

### Electrical

Frequency:	18~40GHz
Gain:	20dB min.
Output Power (P1dB):	20dBm typ.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
Input VSWR:	2 typ.
Output VSWR:	2 typ.
Voltage:	+6V DC
Current:	300mA max.

### Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ2.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

### Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

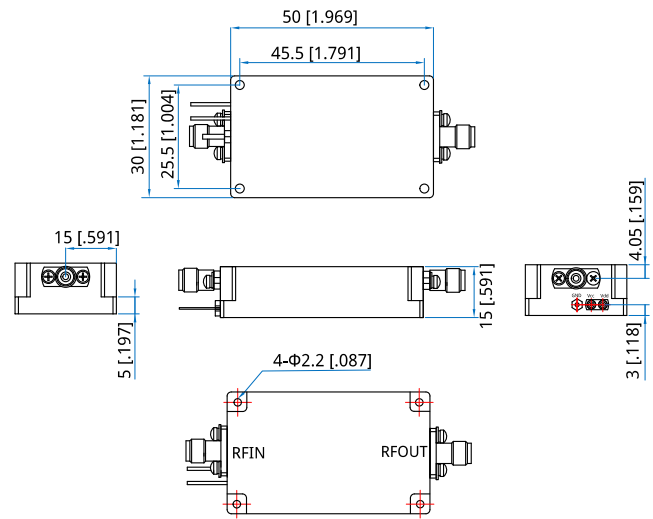

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**NPA-18000-40000-20-20**

Customization is available upon request.