

### NRJ1-18000-12

Singal Channel, DC~18GHz, 12.7mm

- |                               |  |
|-------------------------------|--|
| Features:                     | Applications:                            |
| * Low VSWR                    | * High Speed Digital Signal Transmission |
| * Low VSWR Flatness           | * Analog Signal Transmission             |
| * Low Insertion Loss Flatness |  |

#### Electrical

Frequency:	DC~18GHz
VSWR:	1.4 max.
VSWR Flatness:	0.05 max.
Insertion Loss:	0.3dB max.
Insertion Loss Flatness:	0.05 dB max.
Phase Flatness:	1° max.
Average Power:	500W max. @1GHz 200W max. @6GHz 100W max. @12GHz 30W max. @18GHz
Peak Power:	3000W max.
IP Grade:	IP40 acc. EN 60529

#### Mechanical

Connectors:	SMA female
Rotating Speed:	250RPM max.
Starting Torque:	0.5N.cm max.
Connector Axial Load:	±0.1N max.
Rotating Torque:	0.5 N.cm max.
Connector Radial Load:	±0.1N max.
Operation Life:	10M Cycles
Dielectric:	PTFE

#### How To Order


**NRJ1-18000-12**

Customization is available upon request.

#### Environmental

Temperature: -55~+85°C

#### Outline Drawings

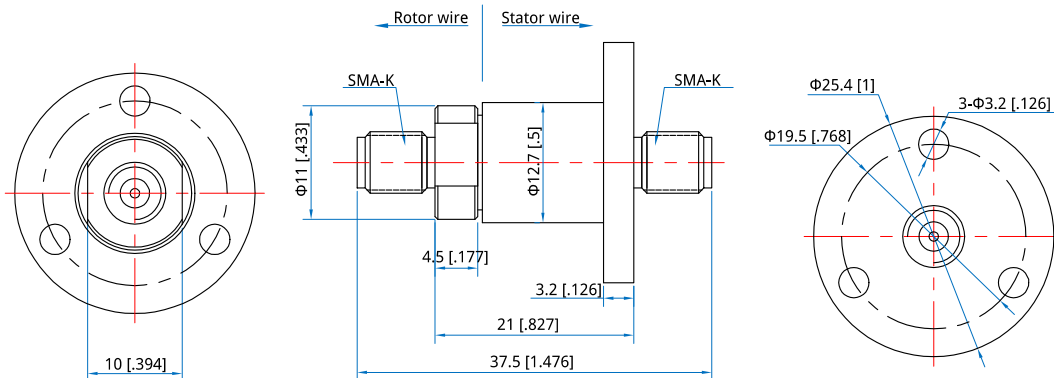

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]