

NRJ1-3000-22

Singal Channel, DC~3GHz, 22mm

- | | |
|-------------------------------|--|
| Features: | Applications: |
| * Low VSWR | * High Speed Digital Signal Transmission |
| * Low VSWR Flatness | * Analog Signal Transmission |
| * Low Insertion Loss Flatness | |

Electrical (Rotary Joint)

Frequency:	DC~3GHz
VSWR:	1.7 max.
VSWR Flatness:	0.05 max.
Insertion Loss:	0.3dB max.
Insertion Loss Flatness:	0.05 dB max.
Phase Flatness:	1° max.
Average Power:	200W max. @1.5GHz 150W max. @3GHz
Peak Power:	500W max.
IP Grade:	IP40 acc. EN 60529

Mechanical (Rotary Joint)

Connectors:	RG405 (SMA, MCX, MMCX)
Rotating Speed:	250RPM max.
Starting Torque:	0.5N.cm max.
Connector Axial Load:	±0.1N max.
Rotating Torque:	0.5 N.cm max.
Connector Radial Load:	±0.1N max.
Operation Life:	10M Cycles
Dielectric:	PTFE

Environmental

Temperature (Rotary Joint):	-55~+85°C
Temperature (Slip Ring):	-30~+80°C

Electrical (Slip Ring)

Voltage:	0~240V
Impedance of Dielectric:	300MΩ min.
Lead Wire:	AWG#26 Silver plated Teflon
Dielectric Resistance:	300V AC @50Hz, 60s
Electrical Noise:	0.01Ω max.
IP Grade:	IP51

Mechanical (Slip Ring)

Operation Life:	10M Cycles
Rotating Speed:	250RPM max.
Contact Material:	Gold
Housing:	Plastic
Torque:	0.01N.m @6 Channels + 0.05N.m

How To Order

NRJ1-3000-22-X-Y

X: Power Circuits

For example:

0610 - 6 circuits@10A


Y: Signal Circuits

For example:

06S - 6 circuits signal@2A

Customization is available upon request.

Outline Drawings

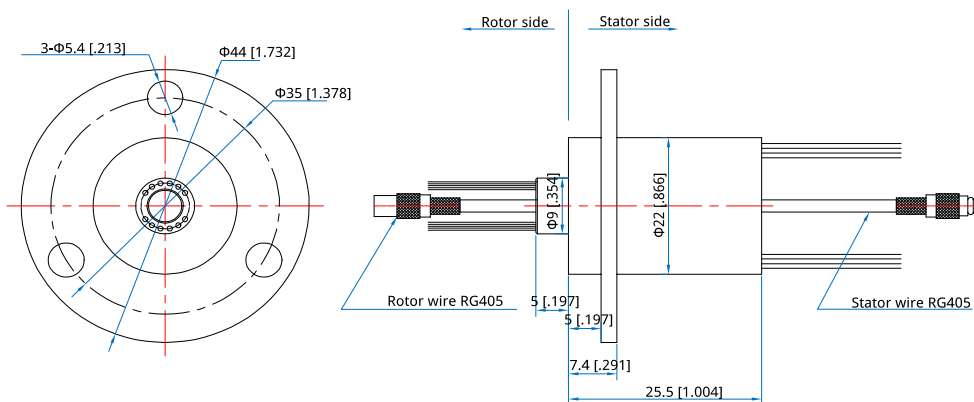

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]