

NRHA75

9.84~15GHz, WR-75

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 9.84~15GHz
Gain: 10, 15, 20, 25dB
VSWR: 1.2 max.


Mechanical

Interface: WR-75 (BJ120)
Flange: FBP120
Material: Aluminium

Environmental

Temperature: -55~+165°C

Outline Drawings

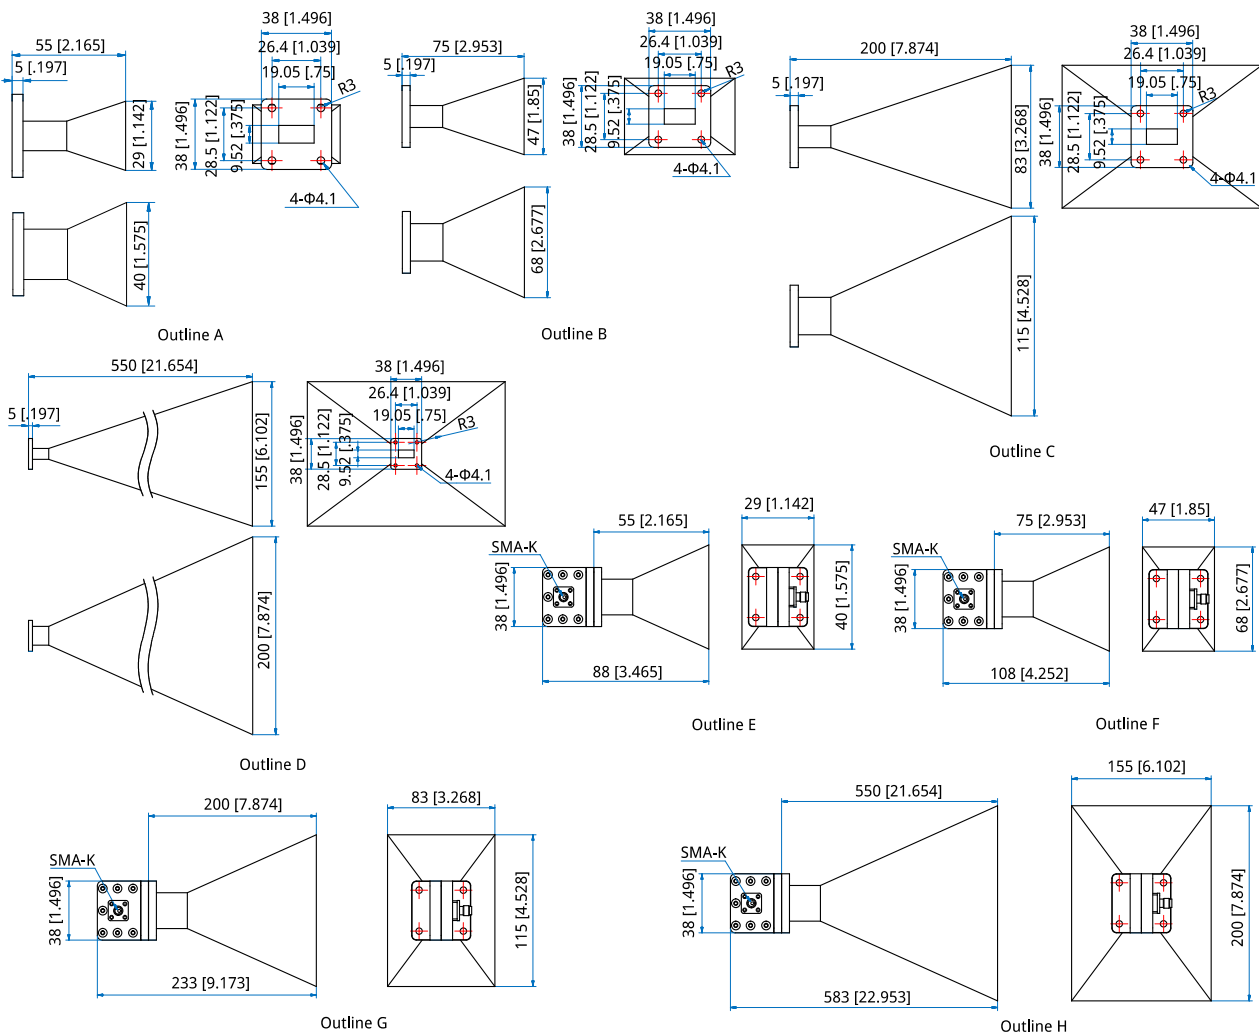

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]



Standard Gain Horn Antennas

How To Order

NRHA75-X-Y-Z

X: Gain in dB

10dB - Outline A, E

15dB - Outline B, F

20dB - Outline C, G

25db - Outline D, H

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female

S -SMA Female (Outline E, F, G, H)

Pannel Mount naming rules:

P - Pannel Mount

Examples:

To order an antenna, 9.84-15GHz, 15dB, WR-75, SMA female, specify NRHA75-15-S.

Customization is available upon request.