

NVLC-1F-1
1mm, DC~110GHz

Features:

- * Low VSWR
- * No welding
- * Reusable
- * Easy installation

Applications:

- * Laboratory Test

Electrical

Frequency: DC~110GHz
 VSWR: 1.5 max.
 Impedance: 50Ω

Mechanical


RF Conductor: 1.0mm Female
 Inner Conductor: Gold plated beryllium copper
 Outer Conductor: SUS303 stainless steel

How To Order

NVLC-1F-1

Customization is available upon request.

Outline Drawings

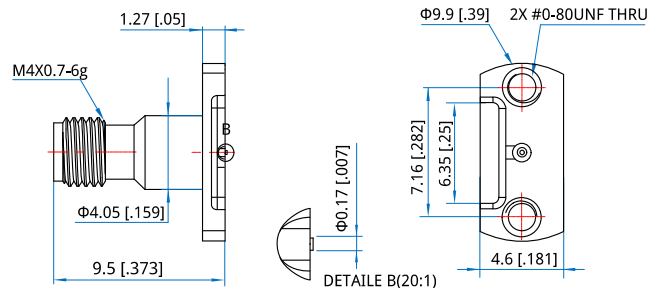

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]