

NVLC-SF-1

SMA, DC~18GHz

- Features:
- * Low VSWR
 - * No welding
 - * Reusable
 - * Easy installation

- Applications:
- * Laboratory Test

Electrical

Frequency: DC~18GHz
 VSWR: 1.3 max.
 Impedance: 50Ω


Mechanical

RF Conductor: SMA Female
 Inner Conductor: Gold plated beryllium copper
 Dielectric: PTFE
 Outer Conductor: Nickel Plated Brass

Environmental

Temperature: -55~+165°C

Outline Drawings

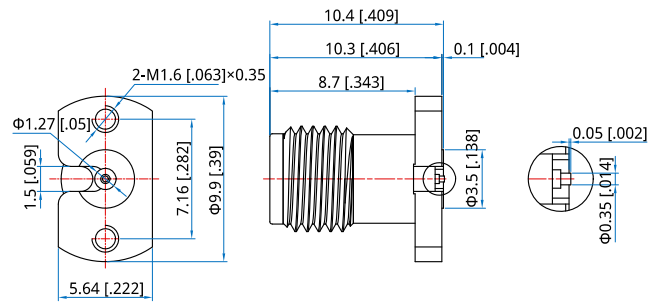

Unit: mm [in]
 Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NVLC-SF-1

Customization is available upon request.