

NDA-1000-40000-63.5-0.5

1~40GHz, 63.5dB, 0.5dB

- | | |
|----------------------|-------------------|
| Features: | Applications: |
| * Broadband | * Wireless |
| * High Dynamic Range | * Transmitter |
| | * Laboratory Test |
| | * Radar |

Electrical

Frequency:	1~40GHz
Insertion Loss:	11.5dB max.
Attenuation Flatness:	±1dB typ. @20dB ±2dB typ. @40dB ±3dB typ. @63.5dB
Step:	0.5dB
Attenuation Range:	0~63.5dB
Attenuation Accuracy:	±2dB typ. @0-63.5dB
VSWR:	1.7 max. @0.5~18GHz 2.0 max. @18~40GHz
Voltage/Current:	±3.3V @30mA Max.
Input Power:	+25dBm max.

Mechanical

Size ^{*1} :	34*18*12mm 1.339*0.709*0.472in
Switching Time:	200 ns
RF Connectors:	SMA Female
Power Supply & Control Interface Connectors:	J30J-15ZKP
Mounting:	4-Φ2.7 through-hole
Logic Input:	On: 1(+1.2~3.3V) Off: 0(0~0.8V)

[1] Exclude connectors.


Pin Numbering

Pin	Function	Pin	Function
1	+3.3V	7	C4
2	COM	8	C5
3	-3.3V	9	C6
4	C1	10	C7
5	C2	11-15	NC
6	C3		

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

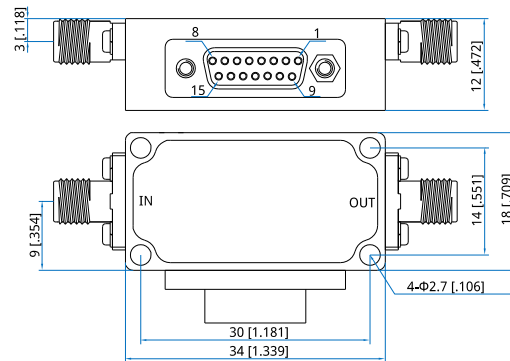

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

Logic Table

State	C1	C2	C3	C4	C5	C6	C7	Att. 63.5dB Reference IL
-	0	0	0	0	0	0	0	0.5dB
1	1	0	0	0	0	0	0	1dB
2	0	1	0	0	0	0	0	2dB
3	0	0	1	0	0	0	0	4dB
4	0	0	0	1	0	0	0	8dB
5	0	0	0	0	1	0	0	16dB
6	0	0	0	0	0	1	0	32dB
7	0	0	0	0	0	0	1	63.5dB
8	1	1	1	1	1	1	1	

How To Order

[NDA-1000-40000-63.5-0.5](#)

Customization is available upon request.