

NPX 897-1747MHz DPX

Duplexer, 880-915MHz / 1710-1785 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency: 880-915 MHz / 1710-1785 MHz

Insertion Loss: 0.8dB max.

Pass Band Ripple : 0.7dB max.

Return Loss : 20.0 dBm

Rejection: 65dB min.

Impedance: 50Ω

Input Power Handling: 100 W @ each input port per port.

Mechanical

Dimension (W*D*H): 100*63*42mm

Finish: Silver plating

Connectors: N Female

Mounting: 4- M3x0.5p DP6.0 through-hole

[1] Exclude connectors.

Environmental


Operation Temperature: -40~ +70°C

How To Order

NPX 897-1747MHz DPX

Customization is available upon request.

Outline Drawings

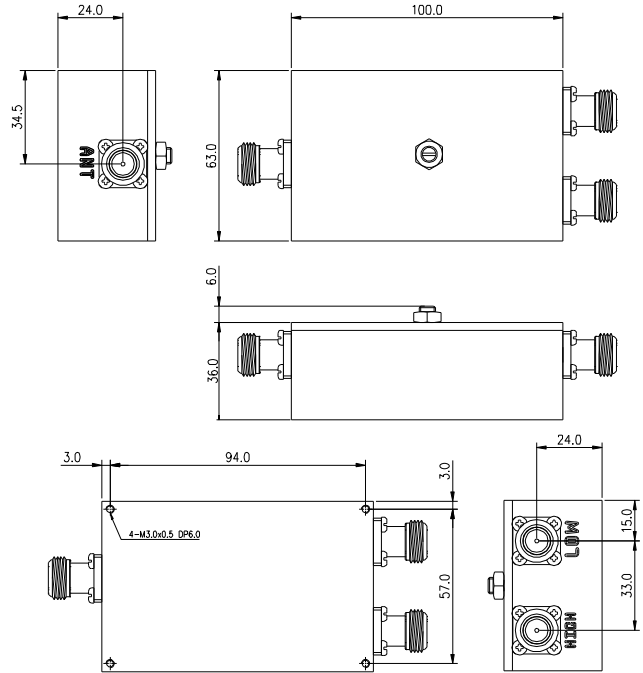

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

