

NLAS-1000-18000-40-30

1~18GHz, 40dB, 3dB

Features:
* Broadband
* Low Noise

Applications:
* Wireless
* Receiver
* Laboratory Test
* Radar

Electrical

Frequency:	1~18GHz
Gain:	40dB min.
Gain Flatness:	±2dB typ.
Output Power (P1dB):	15dBm typ.
Noise Figure:	3dB typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	220V AC
Input Power:	+10dBm max.
Impedance:	50Ω

Mechanical

Size*1:	166*106.4*56.4mm 6.535*4.189*2.22in
Weight:	1Kg max.
RF Connectors:	SMA Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order


NLAS-1000-18000-40-30

Customization is available upon request.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

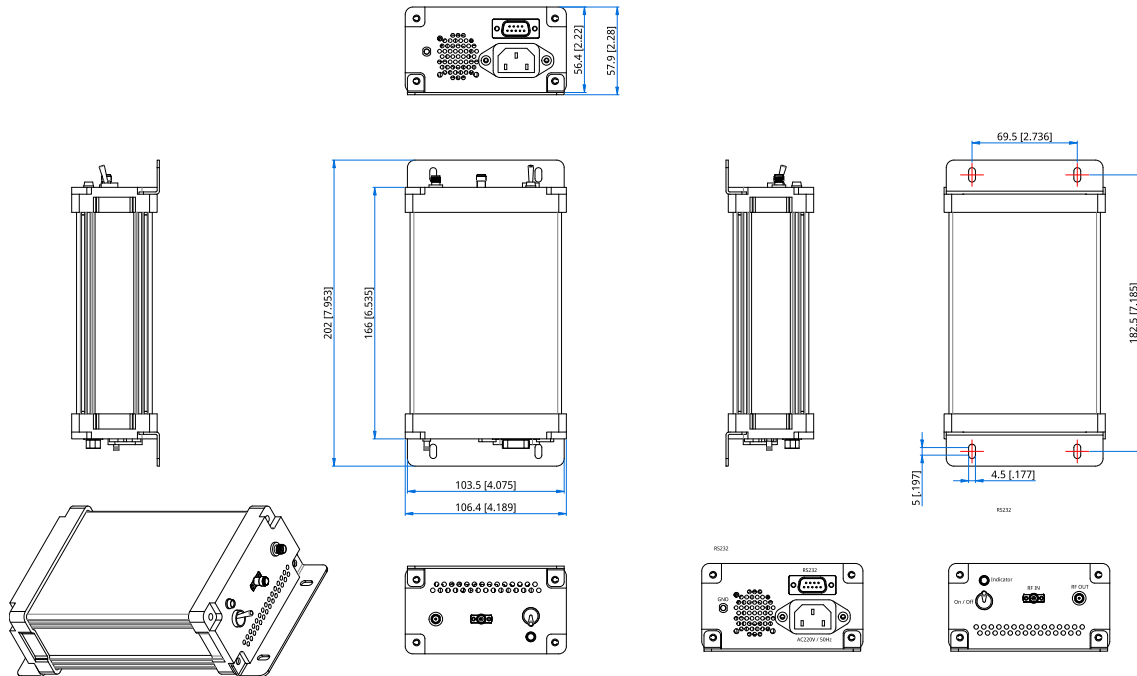

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]