

### NPAS-24000-43000-30-30S

24~43GHz, 30dB, 30dBm

- |                         |                   |
|-------------------------|-------------------|
| Features:               | Applications:     |
| * Small Size            | * Wireless        |
| * Low Power Consumption | * Transmitter     |
|                         | * Laboratory Test |

#### Electrical

Frequency:	24~43GHz
Power Gain:	30dB min.
Intermodulation Rejection Ratio:	-40dBc@20dBm
Gain Flatness:	±3.0dB typ.
Output Power:	30dBm min.
Spurious:	-60dBc max.
Input Power:	+15dBm max.
Input VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω
Protection Function:	With reflected standing wave protection function.

#### Mechanical

Size:	481.8*500*44.3mm
	18.969*19.685*1.744in
RF Connectors:	2.4mm

#### Environmental


Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

#### How To Order

**NPAS-24000-43000-30-30S**

Customization is available upon request.

#### Outline Drawings

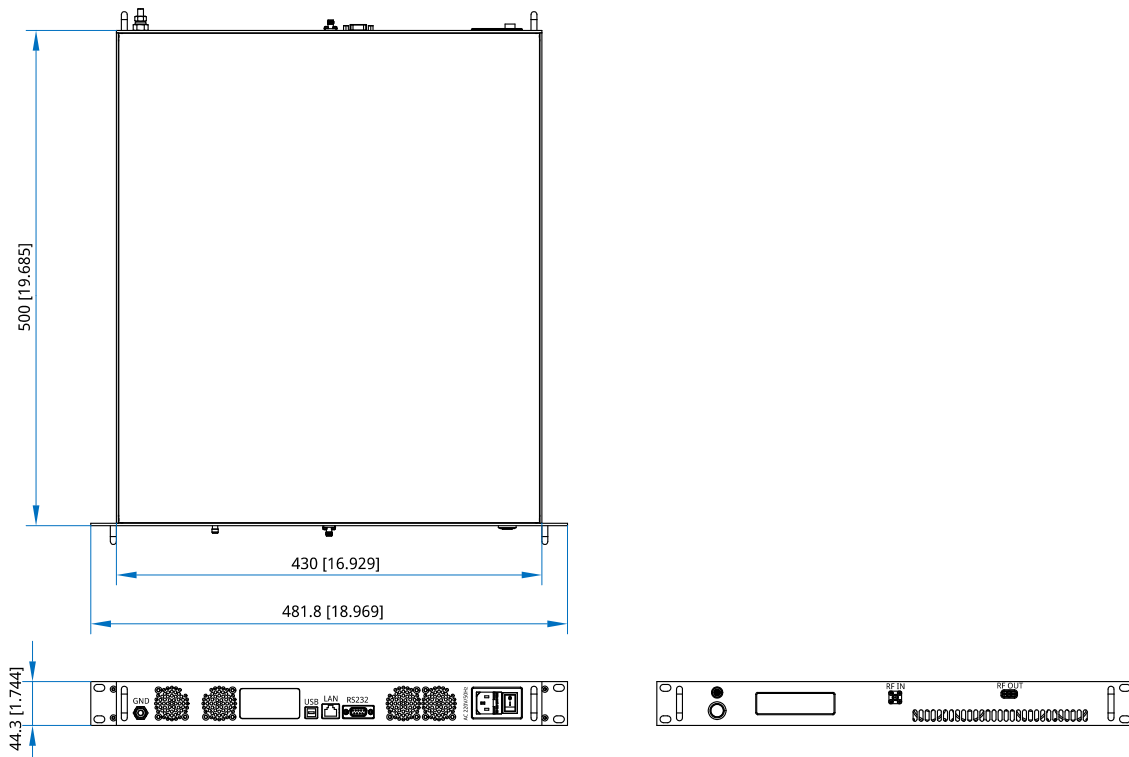

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]